



Function Approximation

Prof. Kuan-Ting Lai

2020/5/15

Large-scale Reinforcement Learning

- Number of states in real-applications
 - Backgammon $\approx 10^{20}$
 - Go $\approx 10^{170}$
- Problem with large state spaces
 - Too many states to be stored in memory
 - Too slow to learn the value of each state
- How to scale-up model-free methods for large states?

Function Approximation


- Using parameterized function to approximate true value function

$$\hat{v}(s, \mathbf{w}) \approx v_{\pi}(s)$$

or $\hat{q}(s, a, \mathbf{w}) \approx q_{\pi}(s, a)$

Where $\mathbf{w} \in \mathbb{R}^d$

Types of Value Function Approximation

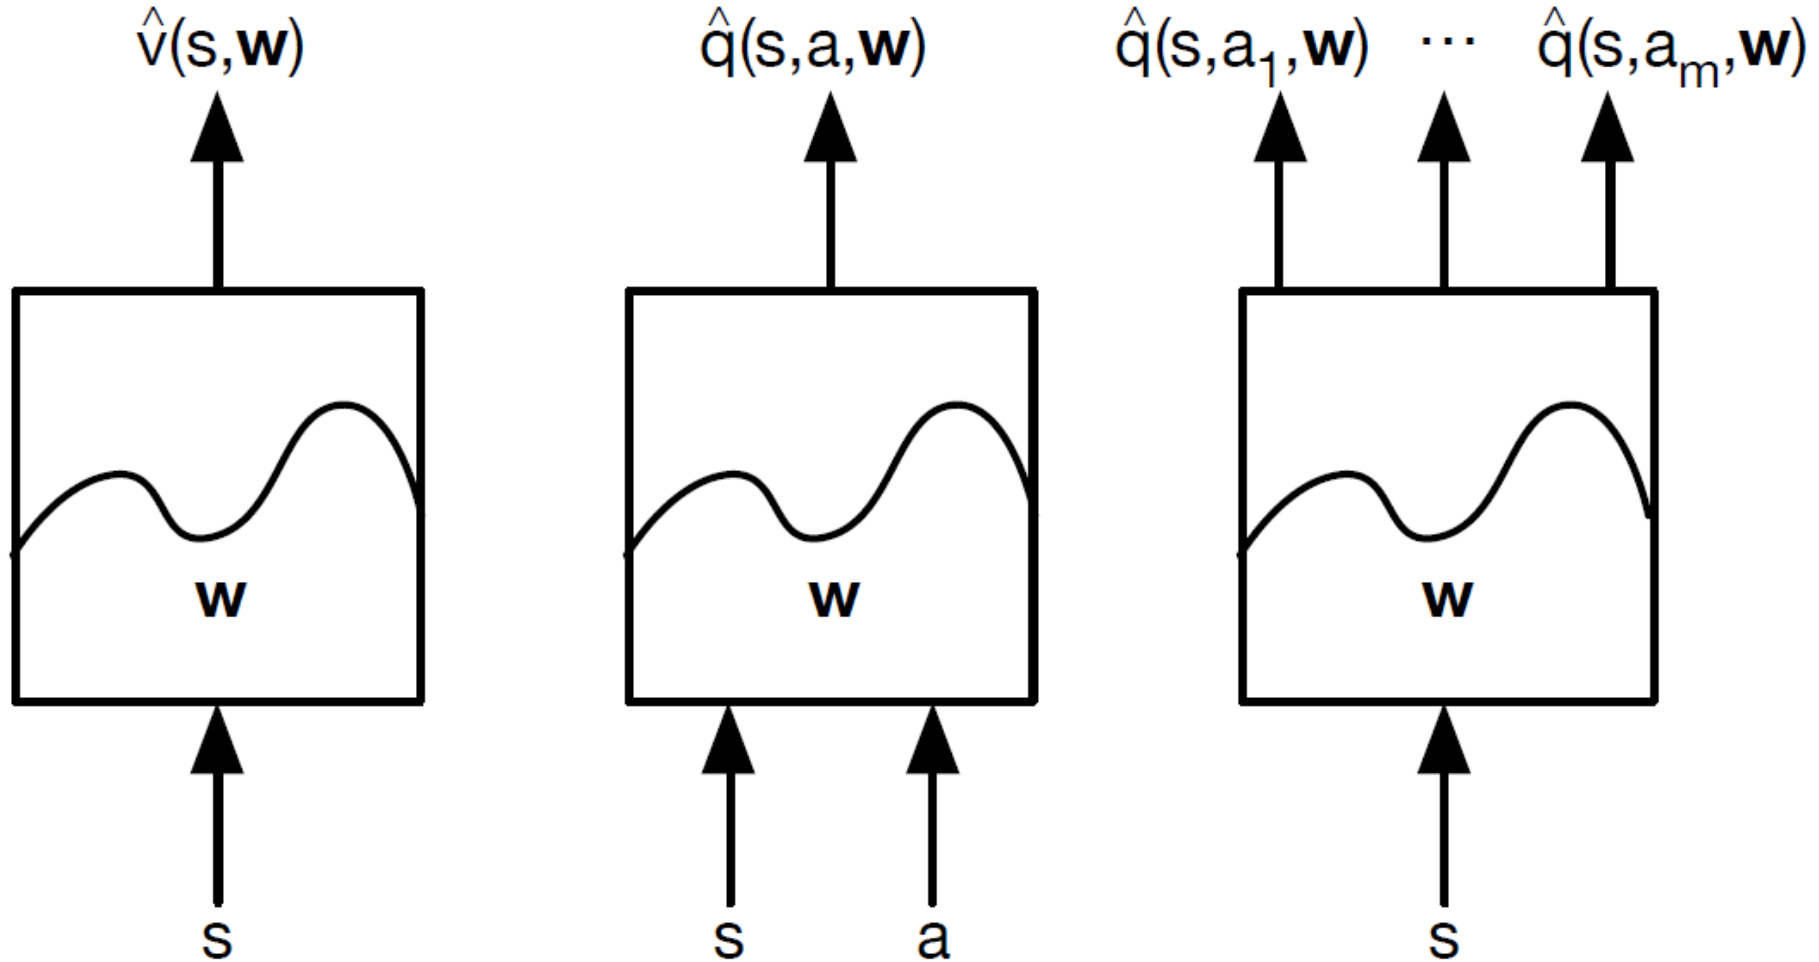


Function Approximators

- Neural Networks
- Linear combinations of features
- Decision tree
- Nearest neighbor
- Fourier / wavelet bases
-

Differentiable Function Approximators

- Linear combinations of features
- Neural Networks
- We also need a training method for **non-stationary, non-iid** data

Gradient Descent

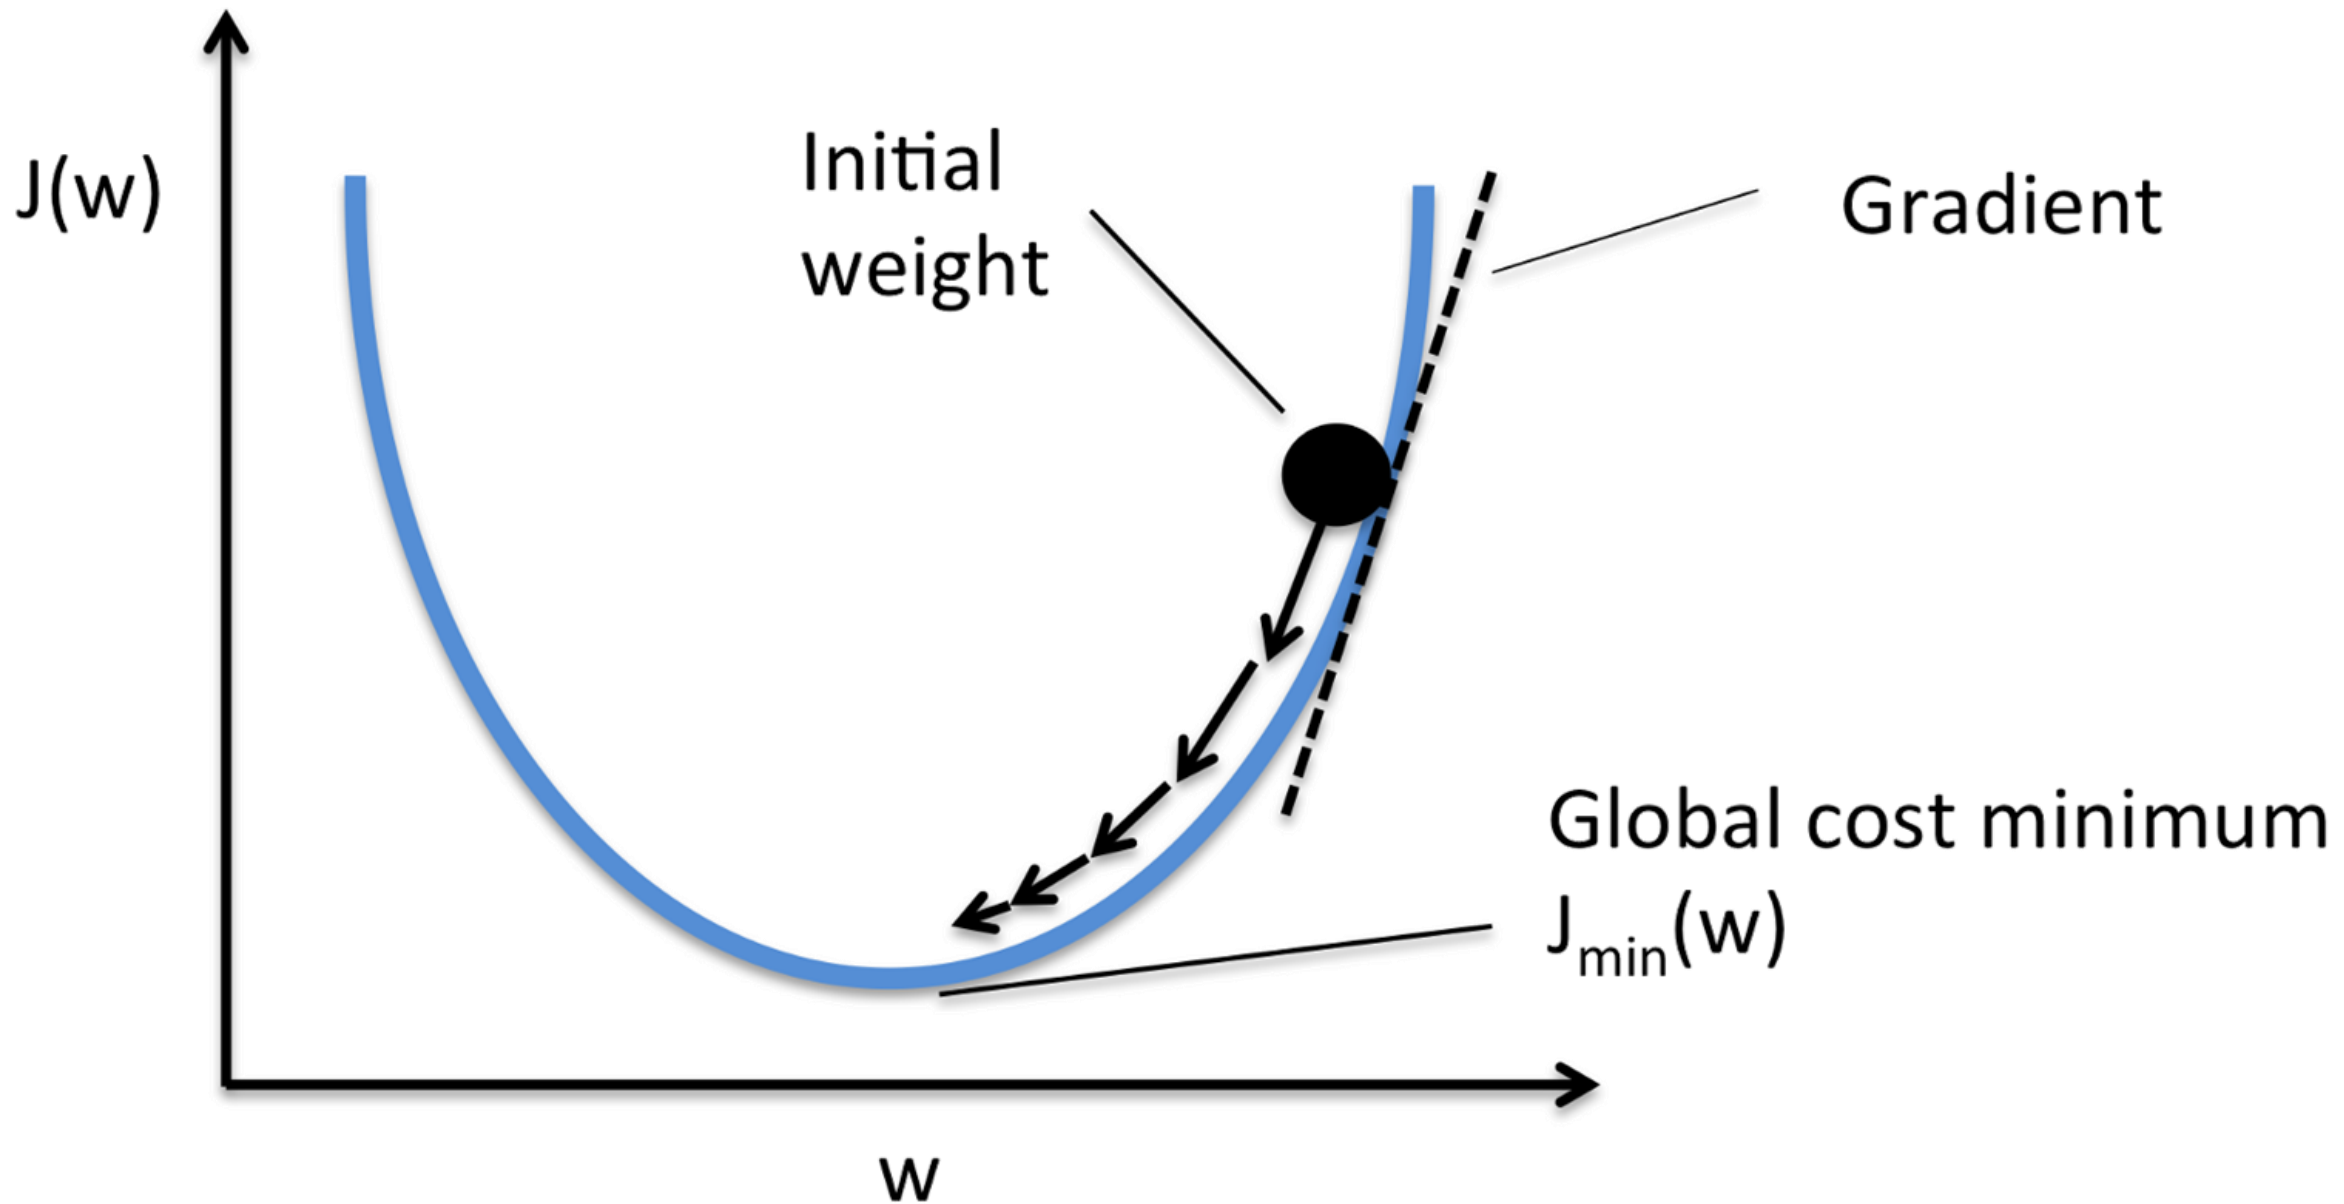


Gradient Descent

- Define the gradient of loss function $J(\mathbf{w})$

$$\nabla_{\mathbf{w}} J(\mathbf{w}) = \begin{pmatrix} \frac{\partial J(\mathbf{w})}{\partial w_1} \\ \vdots \\ \frac{\partial J(\mathbf{w})}{\partial w_n} \end{pmatrix}$$

- Update weight \mathbf{w}

$$\mathbf{w}_{t+1} \leftarrow \mathbf{w}_t - \alpha \nabla_{\mathbf{w}} J(\mathbf{w}_t)$$

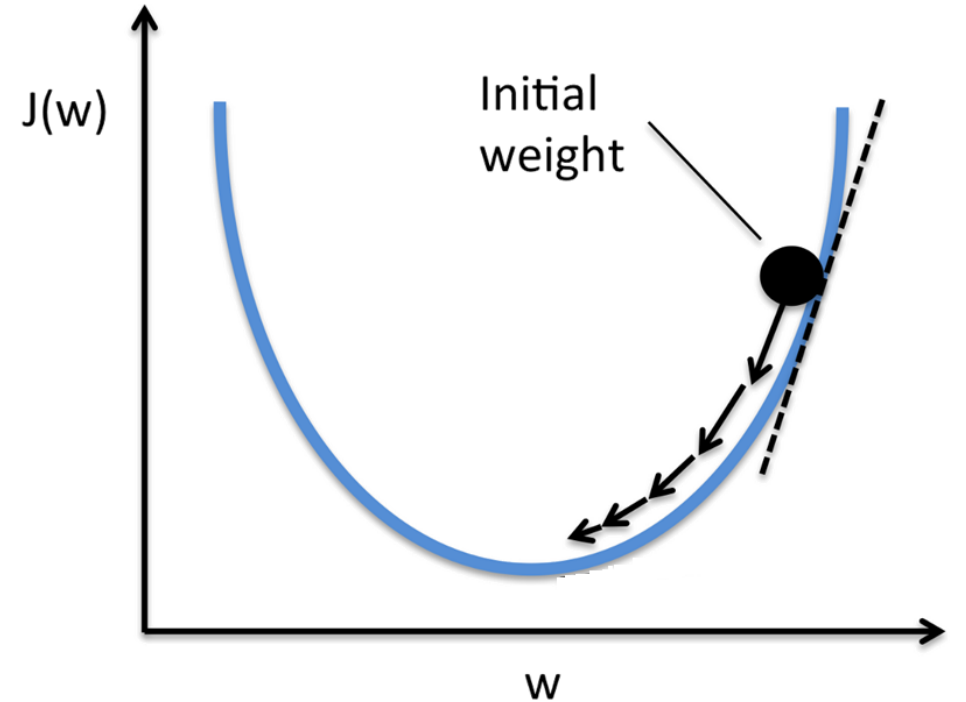

Stochastic Gradient Descent

- Minimize the Mean-squared Error (MSE) between approximate value function $\hat{v}(s, \mathbf{w})$ and true value function $v_\pi(s)$:

$$J(\mathbf{w}) = \mathbb{E}_\pi [(v_\pi(S) - \hat{v}(S, \mathbf{w}))^2]$$

- Gradient descent finds a local minimum

$$\begin{aligned} \Delta \mathbf{w} &= -\frac{1}{2} \alpha \nabla_{\mathbf{w}} J(\mathbf{w}) \\ &= \alpha \mathbb{E}_\pi [(v_\pi(S) - \hat{v}(S, \mathbf{w})) \nabla_{\mathbf{w}} \hat{v}(S, \mathbf{w})] \end{aligned}$$

- Stochastic gradient descent samples training data

Feature Vectors

- Represent states by feature vectors
- Examples:
 - Distance of robot from landmarks, prices in stock market, piece and pawn in chess,...

$$\mathbf{x}(S) = \begin{pmatrix} \mathbf{x}_1(S) \\ \vdots \\ \mathbf{x}_n(S) \end{pmatrix}$$

Linear Approximation

- Approximate value function \mathbf{w} using a linear combination of features

$$\hat{v}(S, \mathbf{w}) = \mathbf{w}^T x(S)$$

$$J(\mathbf{w}) = E_{\pi} \left[(V_{\pi}(S) - \mathbf{w}^T x(S))^2 \right]$$

- Update rule is simple

$$\mathbf{w}_{t+1} \leftarrow \mathbf{w}_t - \alpha (V_{\pi}(S) - \mathbf{w}^T x(S)) x(S)$$

Table Lookup Features

- Table lookup is a special case of linear value function approximation
- Using *table lookup features*

$$\mathbf{x}^{table}(S) = \begin{pmatrix} \mathbf{1}(S = s_1) \\ \vdots \\ \mathbf{1}(S = s_n) \end{pmatrix}$$

- Parameter vector \mathbf{w} gives value of each individual state

$$\hat{v}(S, \mathbf{w}) = \begin{pmatrix} \mathbf{1}(S = s_1) \\ \vdots \\ \mathbf{1}(S = s_n) \end{pmatrix} \cdot \begin{pmatrix} \mathbf{w}_1 \\ \vdots \\ \mathbf{w}_n \end{pmatrix}$$

There is no Supervisor in RL!

- Substitute a target for true value function $v_\pi(s)$

- For MC, the target is the return G_t

$$\Delta \mathbf{w} = \alpha(G_t - \hat{v}(S_t, \mathbf{w})) \nabla_{\mathbf{w}} \hat{v}(S_t, \mathbf{w})$$

- For TD(0), the target is the TD target $R_{t+1} + \gamma \hat{v}(S_{t+1}, \mathbf{w})$

$$\Delta \mathbf{w} = \alpha(R_{t+1} + \gamma \hat{v}(S_{t+1}, \mathbf{w}) - \hat{v}(S_t, \mathbf{w})) \nabla_{\mathbf{w}} \hat{v}(S_t, \mathbf{w})$$

- For TD(λ), the target is the λ -return G_t^λ

$$\Delta \mathbf{w} = \alpha(G_t^\lambda - \hat{v}(S_t, \mathbf{w})) \nabla_{\mathbf{w}} \hat{v}(S_t, \mathbf{w})$$

Monte-Carlo with Value Function Approximation

- Return G_t is an unbiased, noisy sample of true value $v_\pi(S_t)$
- Can therefore apply supervised learning to “training data”:

$$\langle S_1, G_1 \rangle, \langle S_2, G_2 \rangle, \dots, \langle S_T, G_T \rangle$$

- For example, using *linear Monte-Carlo policy evaluation*

$$\begin{aligned}\Delta \mathbf{w} &= \alpha(G_t - \hat{v}(S_t, \mathbf{w})) \nabla_{\mathbf{w}} \hat{v}(S_t, \mathbf{w}) \\ &= \alpha(G_t - \hat{v}(S_t, \mathbf{w})) \mathbf{x}(S_t)\end{aligned}$$

- Monte-Carlo evaluation converges to a local optimum

TD Learning with Value Function Approximation

- The TD-target $R_{t+1} + \gamma \hat{v}(S_{t+1}, \mathbf{w})$ is a *biased* sample of true value $v_\pi(S_t)$
- Can still apply supervised learning to “training data”:

$$\langle S_1, R_2 + \gamma \hat{v}(S_2, \mathbf{w}) \rangle, \langle S_2, R_3 + \gamma \hat{v}(S_3, \mathbf{w}) \rangle, \dots, \langle S_{T-1}, R_T \rangle$$


- For example, using *linear TD(0)*

$$\begin{aligned} \Delta \mathbf{w} &= \alpha (R + \gamma \hat{v}(S', \mathbf{w}) - \hat{v}(S, \mathbf{w})) \nabla_{\mathbf{w}} \hat{v}(S, \mathbf{w}) \\ &= \alpha \delta \mathbf{x}(S) \end{aligned}$$

- Linear TD(0) converges (close) to global optimum

Control with Value Function Approximation

- Policy evaluation Approximate policy evaluation
- Policy improvement ϵ -greedy policy improvement

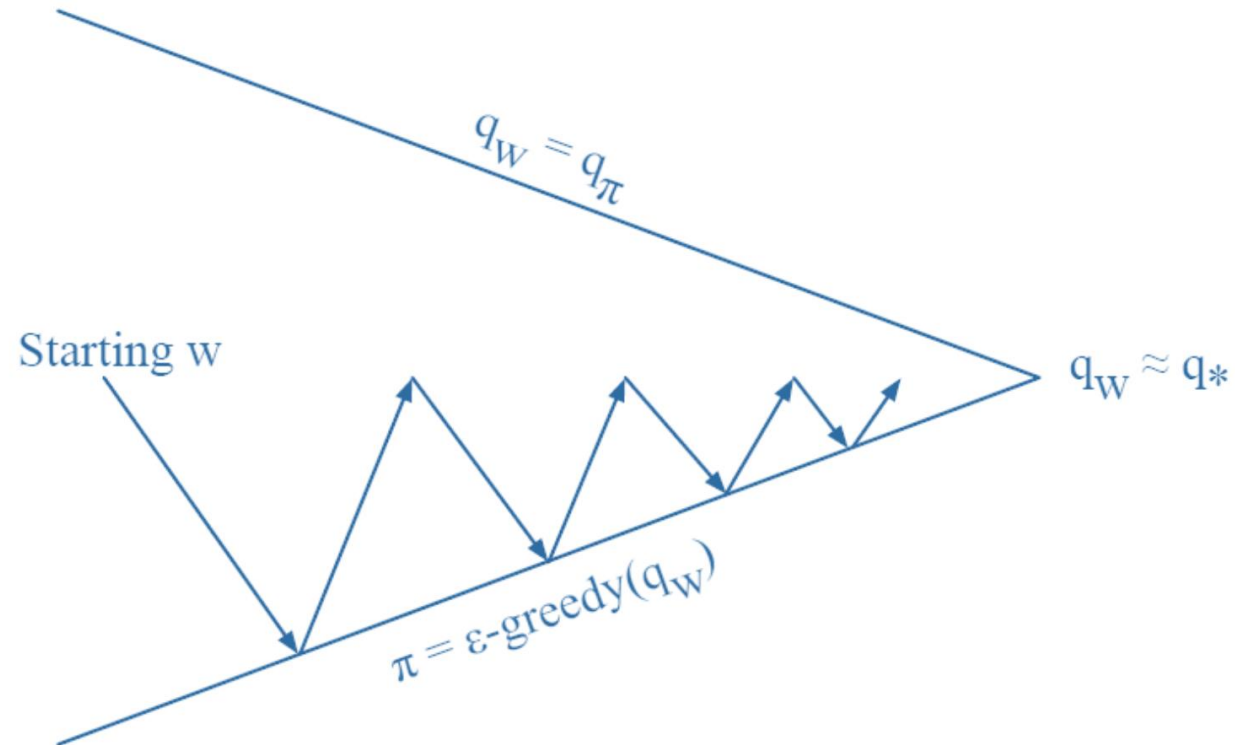

Action-value Function Approximation

- Approximate the action-value function

$$\hat{q}(S, A, \mathbf{w}) \approx q_\pi(S, A)$$

- Minimise mean-squared error between approximate action-value fn $\hat{q}(S, A, \mathbf{w})$ and true action-value fn $q_\pi(S, A)$

$$J(\mathbf{w}) = \mathbb{E}_\pi [(q_\pi(S, A) - \hat{q}(S, A, \mathbf{w}))^2]$$

- Use stochastic gradient descent to find a local minimum

$$-\frac{1}{2} \nabla_{\mathbf{w}} J(\mathbf{w}) = (q_\pi(S, A) - \hat{q}(S, A, \mathbf{w})) \nabla_{\mathbf{w}} \hat{q}(S, A, \mathbf{w})$$

$$\Delta \mathbf{w} = \alpha (q_\pi(S, A) - \hat{q}(S, A, \mathbf{w})) \nabla_{\mathbf{w}} \hat{q}(S, A, \mathbf{w})$$

Linear Action-Value Function Approximation

- Represent state *and* action by a *feature vector*

$$\mathbf{x}(S, A) = \begin{pmatrix} \mathbf{x}_1(S, A) \\ \vdots \\ \mathbf{x}_n(S, A) \end{pmatrix}$$

- Represent action-value fn by linear combination of features

$$\hat{q}(S, A, \mathbf{w}) = \mathbf{x}(S, A)^\top \mathbf{w} = \sum_{j=1}^n \mathbf{x}_j(S, A) \mathbf{w}_j$$

- Stochastic gradient descent update

$$\nabla_{\mathbf{w}} \hat{q}(S, A, \mathbf{w}) = \mathbf{x}(S, A)$$

$$\Delta \mathbf{w} = \alpha (q_\pi(S, A) - \hat{q}(S, A, \mathbf{w})) \mathbf{x}(S, A)$$

Incremental Control Algorithms

- For MC, the target is the return G_t

$$\Delta \mathbf{w} = \alpha(G_t - \hat{q}(S_t, A_t, \mathbf{w})) \nabla_{\mathbf{w}} \hat{q}(S_t, A_t, \mathbf{w})$$

- For TD(0), the target is the TD target $R_{t+1} + \gamma Q(S_{t+1}, A_{t+1})$

$$\Delta \mathbf{w} = \alpha(R_{t+1} + \gamma \hat{q}(S_{t+1}, A_{t+1}, \mathbf{w}) - \hat{q}(S_t, A_t, \mathbf{w})) \nabla_{\mathbf{w}} \hat{q}(S_t, A_t, \mathbf{w})$$

- For forward-view TD(λ), target is the action-value λ -return

$$\Delta \mathbf{w} = \alpha(q_t^\lambda - \hat{q}(S_t, A_t, \mathbf{w})) \nabla_{\mathbf{w}} \hat{q}(S_t, A_t, \mathbf{w})$$

- For backward-view TD(λ), equivalent update is

$$\delta_t = R_{t+1} + \gamma \hat{q}(S_{t+1}, A_{t+1}, \mathbf{w}) - \hat{q}(S_t, A_t, \mathbf{w})$$

$$E_t = \gamma \lambda E_{t-1} + \nabla_{\mathbf{w}} \hat{q}(S_t, A_t, \mathbf{w})$$

$$\Delta \mathbf{w} = \alpha \delta_t E_t$$

Reference

1. David Silver, Lecture 6: Function Approximation
2. Chapter 9, Richard S. Sutton and Andrew G. Barto, “Reinforcement Learning: An Introduction,” 2nd edition, Nov. 2018